


Physical Specification

IP Rating	IP68 (waterproof)
Weight	270g
Response Time	
Water	20 Seconds (to 90% FSD)
Probe	
Material	Stainless steel (316)
Temperature rating	-40°C to 125°C (-40°F to 257°F)
Handle	
Material	Polypropylene & TPR
Temperature rating	-35°C to +125°C (-31°F to +257°F)
Cable	
Material	Silicon rubber
Temperature rating	-60°C to +200°C (-76°F to +392°F)
Connector	
Material	L-104 (TPU)
Temperature rating	-40°C to 85°C (-40°F to 185°F)

Sensor Specification

Measuring Range	-40°C to 125°C (-40°F to 257°F)
Sensor Type	10K NTC Thermistor

Sensor Accuracy

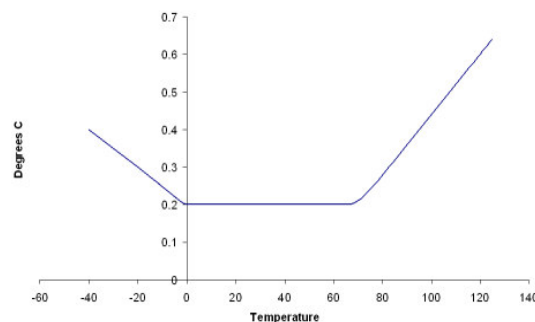

Calibration

A UKAS traceable certificate of calibration can be supplied for an additional charge at the point of purchase.

Related Products

This probe is suitable for use with the following products:

Tinytag Ultra model numbers:

TGU-0020, TGU-0073, TGU-1510, TGU-1515

Tinytag Extra model numbers:

TGX-3020, TGX-3520

Tinytag Plus model numbers:

TGP-0020, TGP-0073, TGP-1510, TGP-1515, TGP-1520

Tinytag Plus Intrinsically Safe model numbers:

TGIS-0020

Tinyview Plus model numbers:

TV-0020, TV-0073, TV-1510, TV-1515

Notes

Manufactured from food grade materials.